



SEAT 20

ОД (Па)

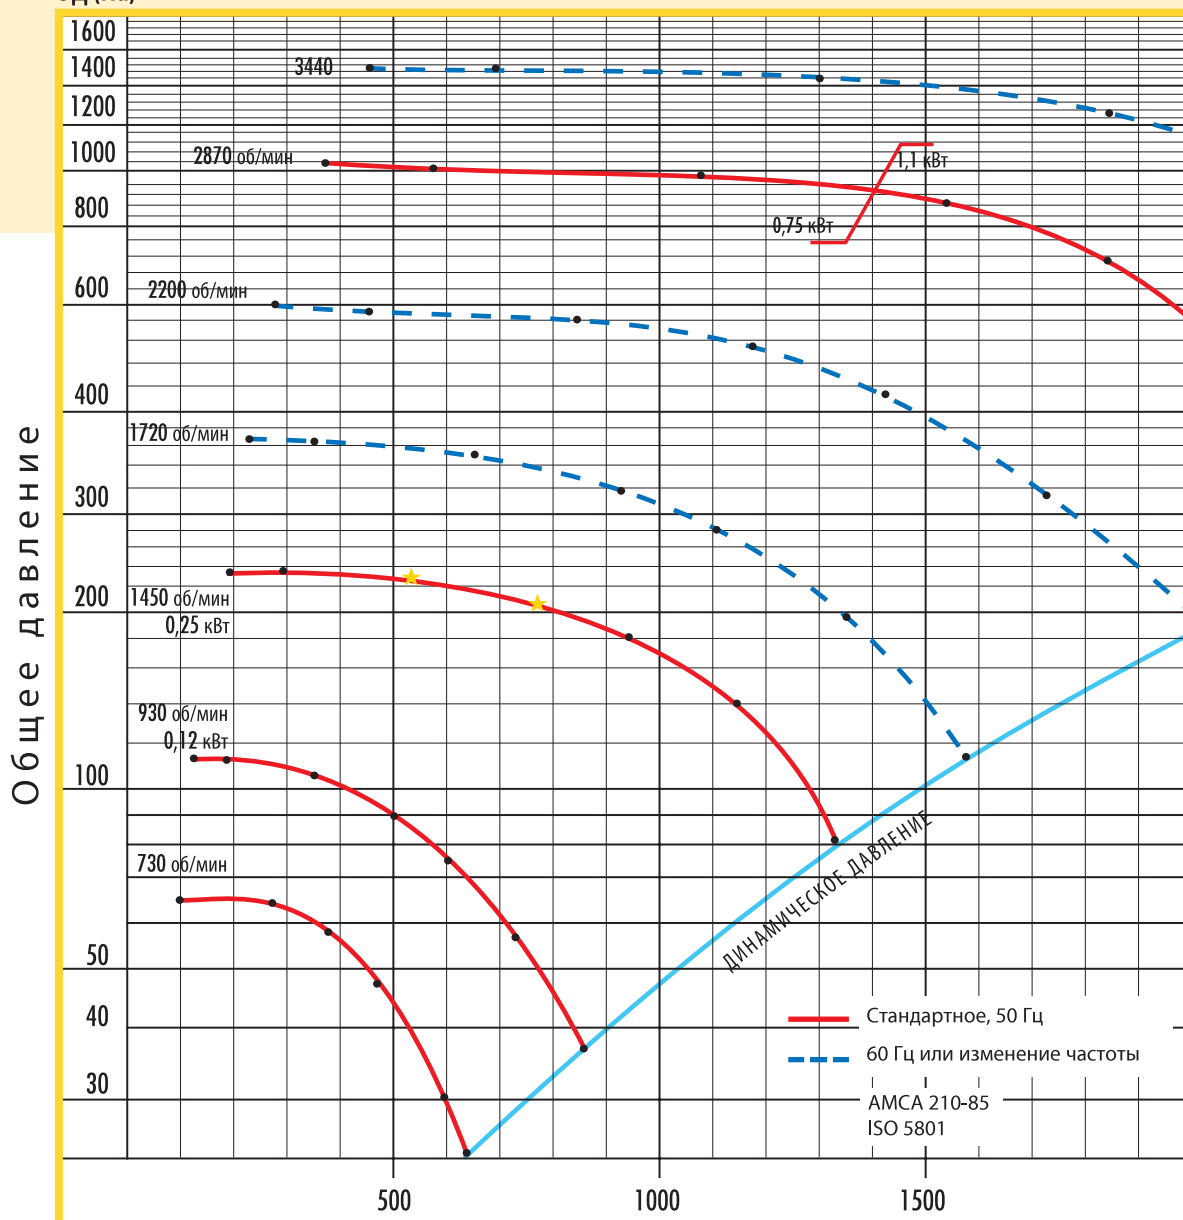

Акустические характеристики

Тип	Об/мин	63 Гц	125 Гц	250 Гц	500 Гц	1000 Гц	2000 Гц	4000 Гц	8000 Гц	Общ. ур. мощ. звука дБ(А)
SEAT 20	950/6 полюса	36	48	51	48	56	45	37	27	41
	1450/4 полюса	42	57	60	57	66	54	47	39	51
	2850/2 полюса	51	71	74	68	85	69	62	56	69

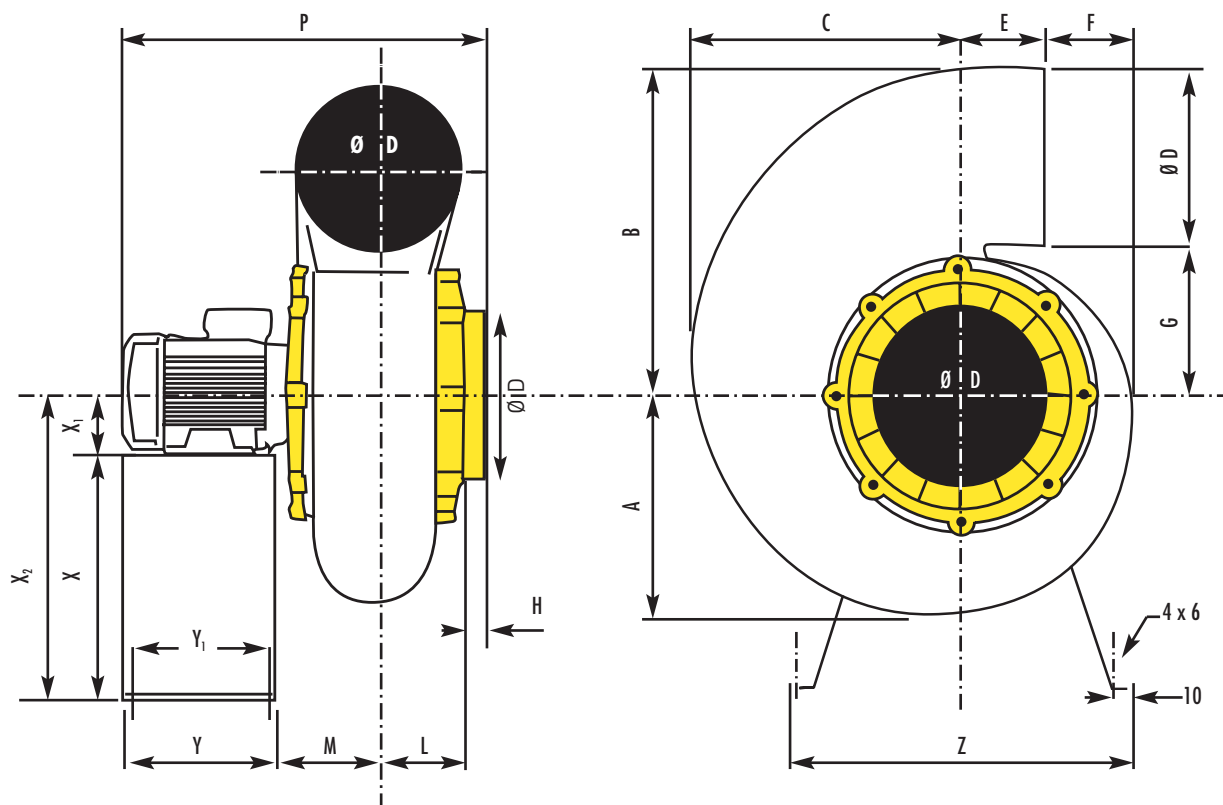

Размеры (мм) – Металлическая опора не поставляется (см. Аксессуары)

Высота оси мотора зависит от используемого типа мотора

A	B	C	Ø D	E	F	G	H	L	M	P	Y	Y ₁	Z	X	X ₁	X ₂
208	303	240	160	100	57	143	32	84	94	390	180	160	340	240	71	311

Положение при сборке – Виды со стороны всасывания



LG 0



LG 45



LG 90



LG 135



LG 180



LG 225



LG 270



LG 315



RD 0



RD 45



RD 90



RD 135



RD 180



RD 225



RD 270



RD 315