


WATER AIR HEATERS KCk

Capacity of the air mentioned in the below table is based, for the following conditions:	
Inlet air temperature, °C	minus 20
Inlet water temperature, °C	150
Outlet water temperature, °C	70

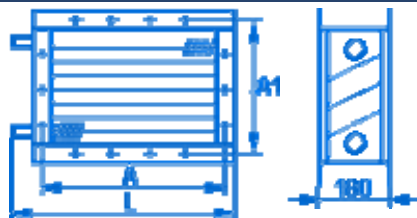

Main technical characteristics of the air heaters KCk								
Brand	Overall dimensions, mm				Capacity		Heat-exchange surface, m ²	Weight, kg
	A	A ₁	L	Д _y	air throughput, m ³	heat exchange, kW		
KCk3-6-02 ХЛЗБ	578	551	650	32	2500	50,7	13,8	33
KCk3-7-02 ХЛЗБ	703		775		3150	65,4	17,0	38
KCk3-8-02 ХЛЗБ	828		900		4000	83,2	20,2	43
KCk3-9-02 ХЛЗБ	953		1025		5000	103,5	23,4	48
KCk3-10-02 ХЛЗБ	1203		1275		6300	135,6	29,8	58
KCk3-11-02 ХЛЗБ	1703	1051	1775	50	16000	360,0	86,4	156
KCk3-12-02 ХЛЗБ	1703	1551	1775		25000	556,7	130,3	230
KCk4-6-02 ХЛЗБ	578	551	650	32	2500	59,1	18,1	39
KCk4-7-02 ХЛЗБ	703		775		3150	76,1	22,3	46
KCk4-8-02 ХЛЗБ	828		900		4000	97,0	26,5	52
KCk4-9-02 ХЛЗБ	953		1025		5000	120,9	30,8	59
KCk4-10-02 ХЛЗБ	1203		1275		6300	157,6	39,2	72
KCk4-11-02 ХЛЗБ	1703	1051	1775	50	16000	417,7	114,5	197
KCk4-12-02 ХЛЗБ	1703	1551	1775		25000	648,4	172,9	293

Depth of the air heaters - 180 mm.